
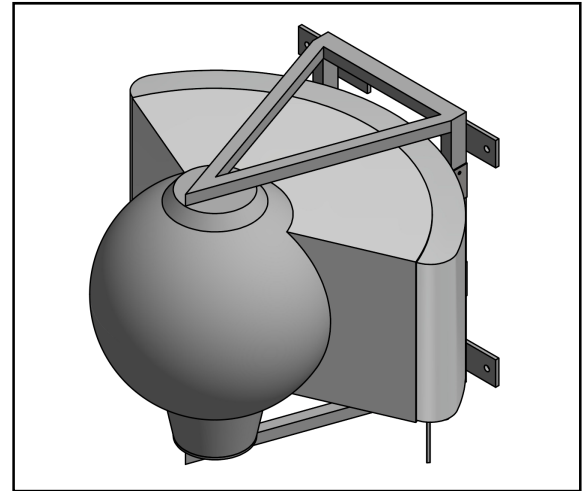


MS-12C45


Multi-Beam Spherical Lens Antenna: Two rows of 6 independent C-Band frequency (3.7 – 4.2GHz) cross-polarized beams. Tilt is factory set for each beam.

BEAM LAYOUT:

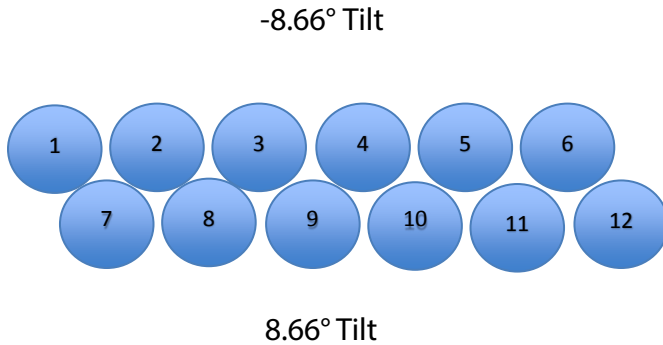


PATTERN RESULTS (3.95GHz):


Horizontal Pattern top row

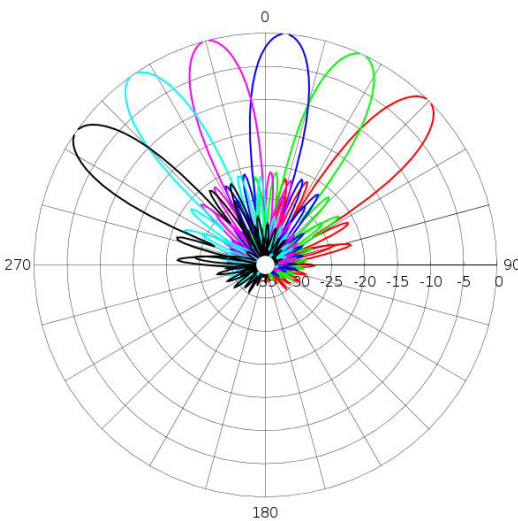

Horizontal Pattern bottom row

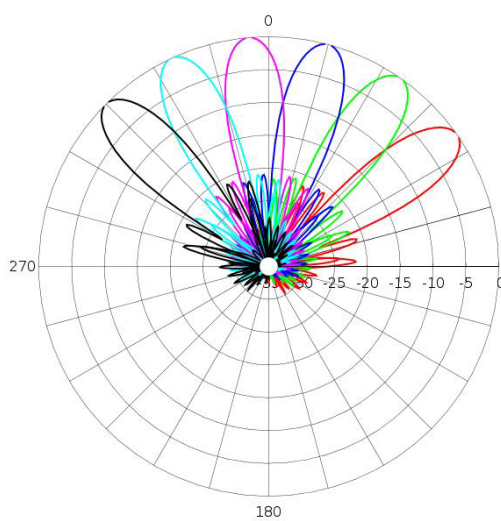

Vertical Pattern

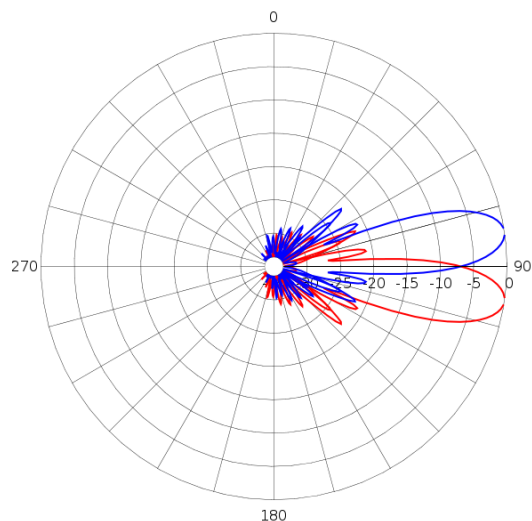

TECHNICAL SPECIFICATIONS PER BEAM

Frequency	3.7– 4.2GHz
Gain	22dBi
VSWR	<1.5:1
Polarization	Dual Slant ±45°
Horizontal Coverage	120°
Horizontal Beamwidth (10dB level)	20°
Horizontal Beamwidth (3dB level)	12°
Vertical Beamwidth (10dB level)	20°
Vertical Beamwidth (3dB level)	12°
Beam Cross-over	10dB typical
Total Number of Beams	12
Beam Tilt (Factory Set):	Fixed Tilt Top Row: - 8.66° Bottom Row: 8.66°
First Sidelobe level	<-16dB
Front to Back Ratio	>28dB
Isolation Port to Port - Polarization	>28dB
Isolation Port to Port - Beam	>28dB
Power Rating	100W per port
Intermodulation	<-153dBc
Impedance	50 ohm
Connector Quantity and Type	24 x 4.3-10 female

MECHANICAL DATA

Dimensions (H x W x D)	Spherical Lens diameter: 45 cm/18 inch Antenna dimensions: 61.7 x 78.9 x 69.3 cm 24.3 x 31.1 x 27.3 inch
Antenna Weight	18.3 kg 40.3 lbs
Radome Material	Fiber Glass
Mounting	2 position pipe mount Compatible pipe diameter: 6.1 – 11.4 cm 2.4 – 4.5 inch

ENVIRONMENTAL RATINGS

Humidity	95% RH @ +30°C
Temperature	-40°C to +70°C
Wind load @ 150 km/hr	[N/lbf] Frontal: 284.8/64 Lateral: 245/55

CONNECTOR LAYOUT

