
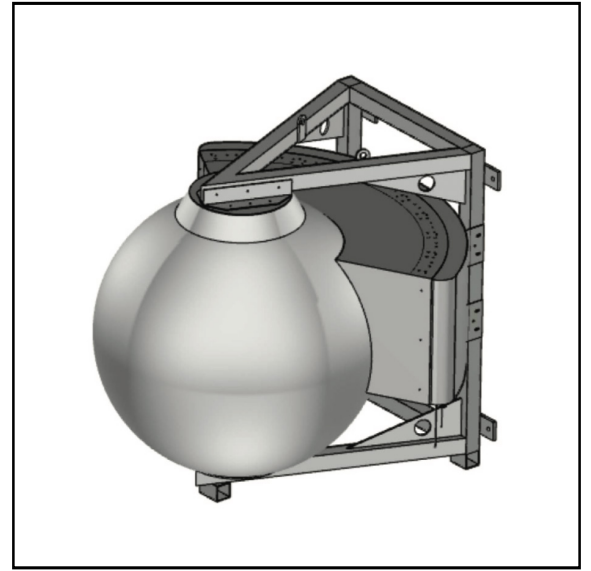


## MS-12L180


Multi-Beam Wide Band Spherical Lens Antenna: 12 independent low frequency (698-960MHz) cross-polarized beams.

### BEAM LAYOUT:

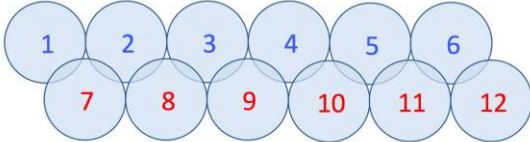


### PATTERN RESULTS:


Horizontal Pattern Row 1 (850MHz)

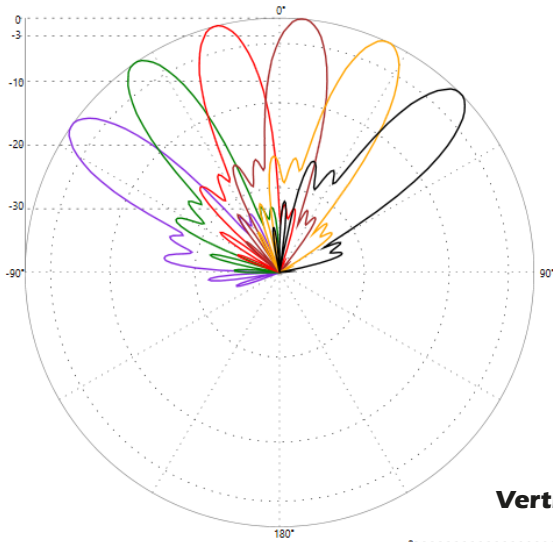

Horizontal Pattern Row 2 (850MHz)

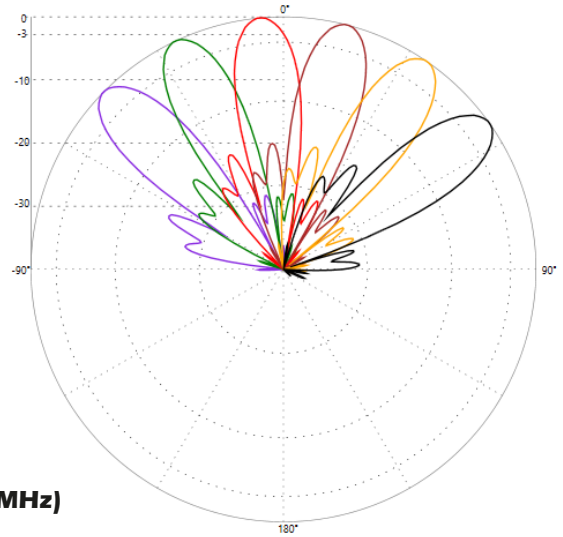

Vertical Pattern (850MHz)

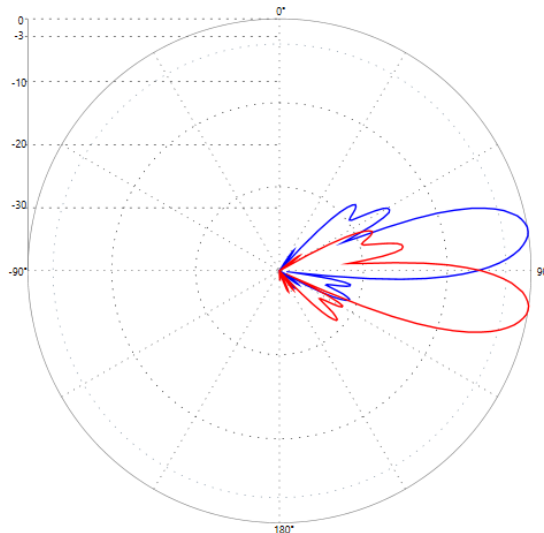

### TECHNICAL SPECIFICATIONS PER BEAM

Frequency	698 - 960 MHz
Gain	20.5dBi
VSWR	<1.5:1
Polarization	Dual Slant ±45°
Horizontal Coverage per row Total coverage	120° 130°
Horizontal Beamwidth (10dB level) Horizontal Beamwidth (3dB level)	20° 12°
Vertical Beamwidth (10dB level) Vertical Beamwidth (3dB level)	20° 12°
Beam Cross-over	10dB typical
Total Number of Beams	12
Tilt	Factory Set
First Sidelobe level	<-15dB
Front to Back Ratio	>28dB
Isolation Port to Port - Polarization	>28dB
Isolation Port to Port - Beam	>28dB
Power Rating	250W per port
Total Applied Power	≤ 2.5KWatts
Intermodulation	<-153dBc
Impedance	50 ohm
Connector Quantity and Type	24 x 4.3-10 female

### MECHANICAL DATA

Dimensions (H x W x D)	Spherical Lens diameter: 180cm/70inch  Antenna dimensions: 187.1 x 213.6 x 201.9 cm 73.7 x 84.1 x 79.5 inch
Antenna Weight	233.1 kg 513.9 lbs
Radome Material	Fiber Glass
Mounting	2 position pipe mount  Compatible pipe diameter: 6.1 – 11.4 cm 2.4 – 4.5 inch

### ENVIRONMENTAL RATINGS

Humidity	95% RH @ +30°C
Temperature	-40°C to +70°C
Wind load @ 150 km/hr	N/lbf Frontal: 2046 /459 Lateral: 2321/522

### CONNECTOR LAYOUT:

