
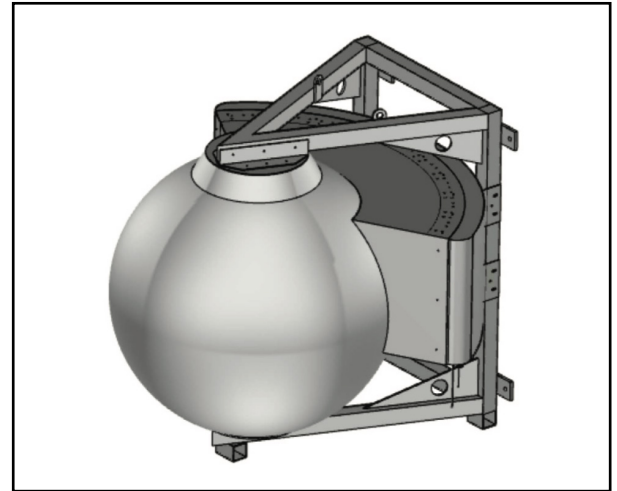


MS-12T180


Multi-Beam Spherical Lens Antenna. Twelve independent low frequency (617-896MHz) cross-polarized beams.

BEAM LAYOUT:

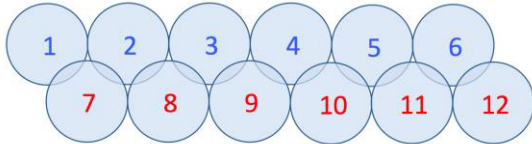


PATTERN RESULTS:


Horizontal Pattern Row 1 (850MHz)

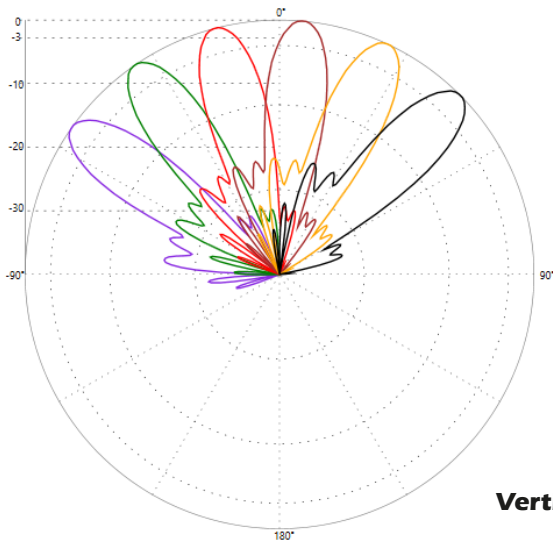

Horizontal Pattern Row 2 (850MHz)

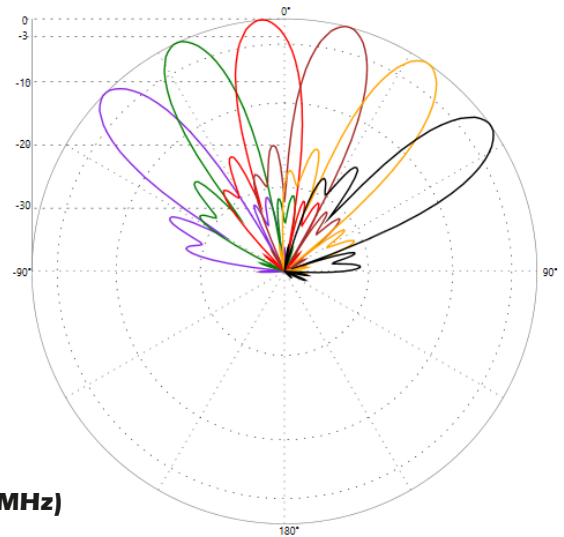

Vertical Pattern (850MHz)

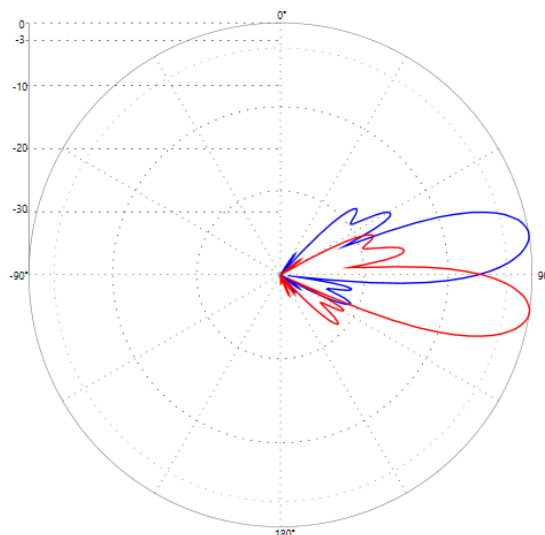

TECHNICAL SPECIFICATIONS PER BEAM

Frequency	617 - 896 MHz
Gain	20.5dBi
VSWR	<1.5:1
Polarization	Dual Slant $\pm 45^\circ$
Horizontal Coverage per row Total coverage	120° 130°
Horizontal Beamwidth (10dB level) Horizontal Beamwidth (3dB level)	20° 12°
Vertical Beamwidth (10dB level) Vertical Beamwidth (3dB level)	20° 12°
Beam Cross-over	10dB typical
Total Number of Beams	12
Tilt	Factory Set
First Sidelobe level	<-15dB
Front to Back Ratio	>28dB
Isolation Port to Port - Polarization	>28dB
Isolation Port to Port - Beam	>28dB
Power Rating	250W per port
Total Applied Power	$\leq 2.5\text{KWatts}$
Intermodulation	<-153dBc
Impedance	50 ohm
Connector Quantity and Type	24 x 4.3-10 female

MECHANICAL DATA

Dimensions (H x W x D)	Spherical Lens diameter: 180cm/70inch Antenna dimensions: 187.7 x 213.6 x 201.9 cm 73.9 x 84.1 x 79.5 inch
Antenna Weight	233kg/513.6 lbs [w/o Bracket] 240kg/529 lbs [w/ Bracket]
Radome Material	Fiber Glass
Mounting	2 position pipe mount Compatible pipe diameter : 6.1 – 11.4 cm 2.4 – 4.5 inch

ENVIRONMENTAL RATINGS

Humidity	95% RH @ +30°C
Temperature	-40°C to +70°C
Wind load @ 150 km/h	N/lbf Frontal: 2046/459 Lateral: 2321/522 Rear: 2273/511

CONNECTOR LAYOUT:

