
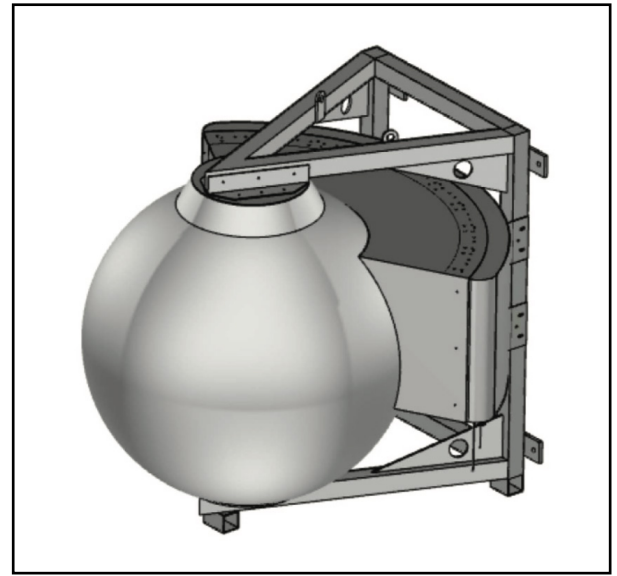



MS-24C90

Multi-Beam Wide Band Spherical Lens Antenna: 2 rows of 12 independent C-Band (3.7-4.2GHz) cross-polarized beams. Factory set tilt for each beam.

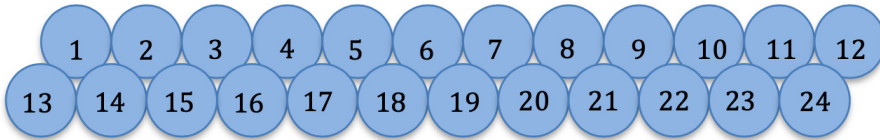


PATTERN RESULTS (3.9GHz):


Horizontal pattern Row 1

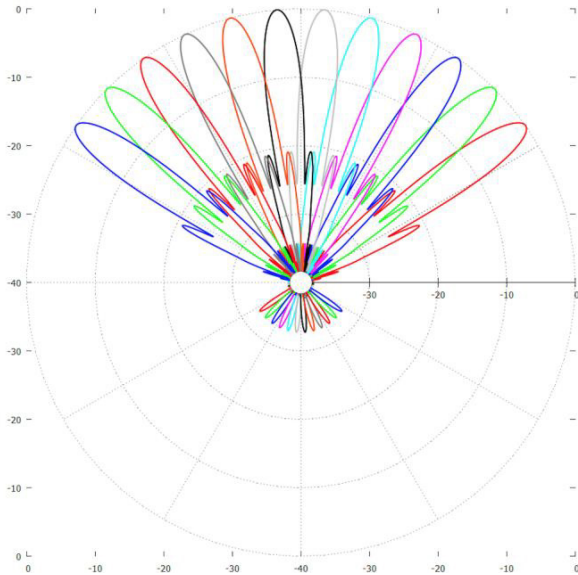

Horizontal pattern Row 2

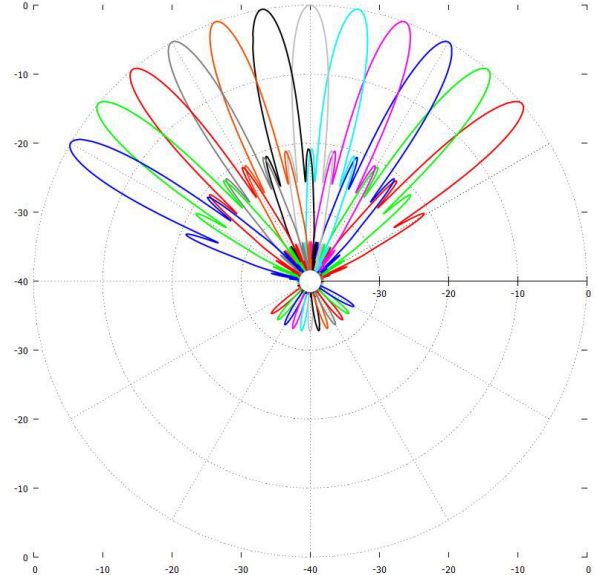

Vertical pattern

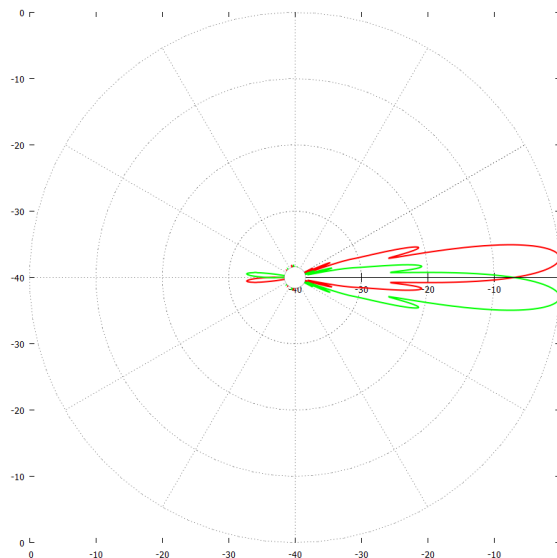

TECHNICAL SPECIFICATIONS PER BEAM

Frequency	3.7-4.2 GHz
Gain	26dBi
VSWR	<1.5:1
Polarization	Dual Slant $\pm 45^\circ$
Horizontal Coverage	120°
Horizontal Beamwidth (10dB level) Horizontal Beamwidth (3dB level)	10° 6°
Vertical Beamwidth (10dB level) Vertical Beamwidth (3dB level)	10° 6°
Beam Cross-over	10dB typical
Total Number of Beams	24
Beam Tilt (Factory Set)	- 15° Upper Row +15° Lower Row
First Sidelobe level	<-16dB
Front to Back Ratio	>28dB
Isolation Port to Port - Polarization	>28dB
Isolation Port to Port - Beam	>28dB
Power Rating	50W per port
Intermodulation	<-153dBc
Impedance	50 ohm
Connector Quantity and Type	48 X 4.3-10 female

MECHANICAL DATA

Dimensions (H x W x D)	Spherical Lens diameter: 90cm/35inch Antenna dimensions: 105.4 x 108.4 x 109.9 cm 41.5 x 42.7 x 43.3 inch
Antenna Weight	43.9 kg 96.8 lbs
Radome Material	Fiber Glass
Mounting	2 position pipe mount Compatible pipe diameter: 6.1 – 11.4 cm 2.4 – 4.5 inch

ENVIRONMENTAL RATINGS

Humidity	95% RH @ +30°C
Temperature	-40°C to +70°C
Wind load @ 150 km/h	N/ lbf Frontal: 429.3/96.5 Lateral: 562.8/126.5

CONNECTOR LAYOUT:

