



MS-8.4DB120-T

Multi-Beam Dual Band Spherical Lens Antenna: 4 independent low frequency (617 - 896MHz) cross-polarized beams and 8 independent high-frequency (1695 - 2690MHz) cross-polarized beams. High-band tilt range = 0 - 15° & Low-band tilt range = 7.5 - 22.5° for each sector. The sector consists of 1 low-band beam and 2 high band beams.

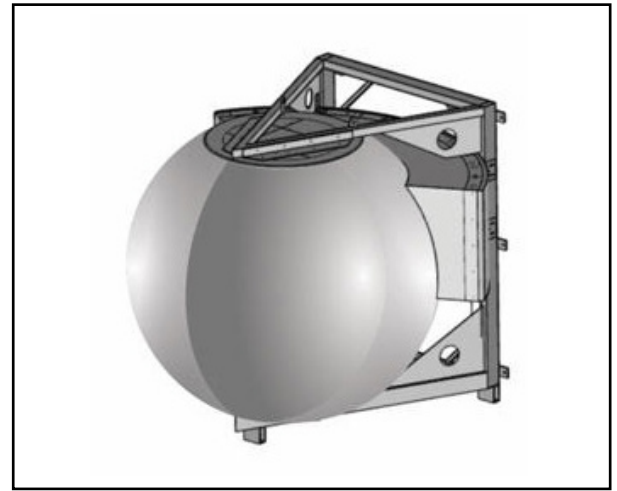


PATTERN RESULTS:


High-Band Horizontal Pattern (1.80GHz)

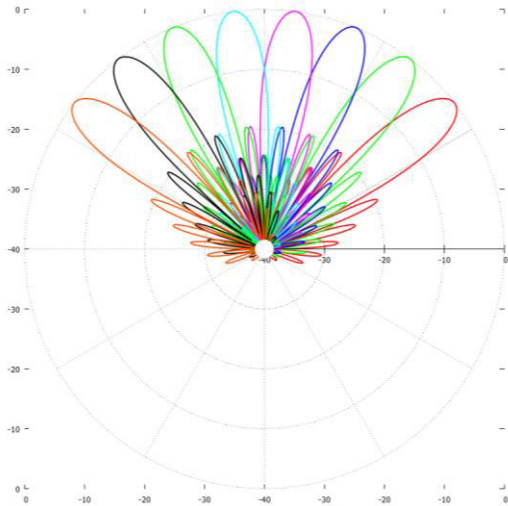


High-Band Vertical pattern (1.80GHz)

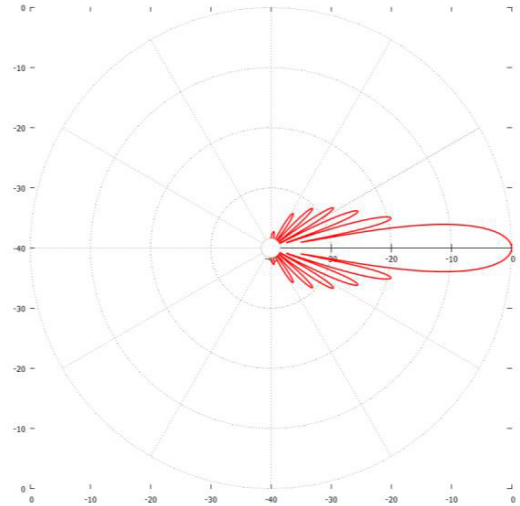

Low-Band Horizontal Pattern (0.80GHz)

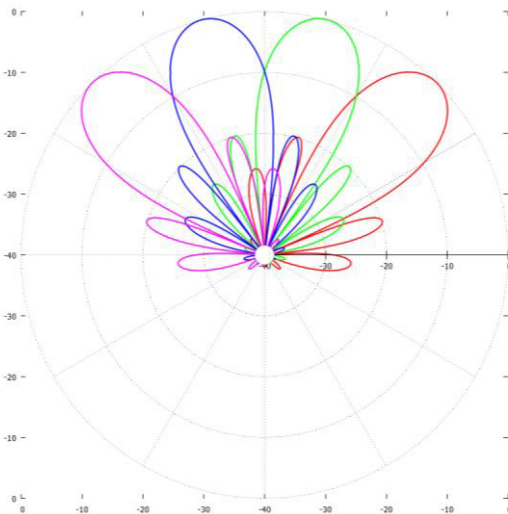

Low-Band Vertical Pattern (0.80GHz)

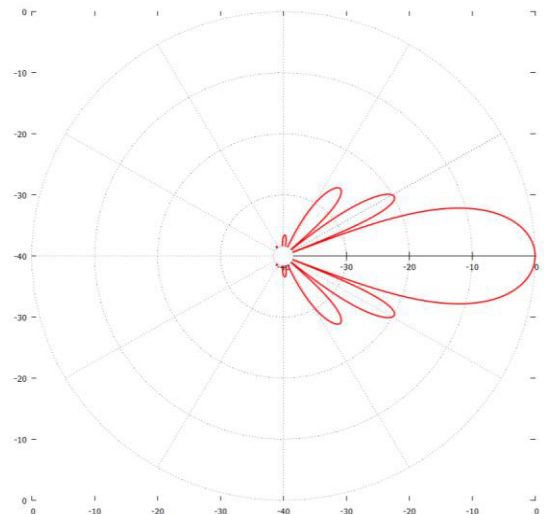

TECHNICAL SPECIFICATIONS PER BEAM

Frequency	617-896 MHz	1695-2690 MHz
Gain	16dBi	24dBi
VSWR	<1.5:1	<1.5:1
Polarization	Dual Slant $\pm 45^\circ$	Dual Slant $\pm 45^\circ$
Horizontal Coverage	120°	120°
Horizontal Beamwidth (10dB level)	30°	15°
Horizontal Beamwidth (3dB level)	17°	8.5°
Vertical Beamwidth (10dB level)	30°	15°
Vertical Beamwidth (3dB level)	17°	8.5°
Beam Cross-over	10dB typical	10dB typical
Total Number of Beams	4	8
Manual Adjustable Tilt per 30° sector (each sector having 2 high-band beams and 1 low-band beam)	7.5° to 22.5°	0° to 15°
Sidelobe level	<-15dB	<-16dB
Front to Back Ratio	>28dB	>28dB
Isolation Port to Port - Polarization	>28dB	>28dB
Isolation Port to Port - Beam	>26dB	>28dB
Power Rating	250W per port	250W per port
Intermodulation	<-153dBc	<-153dBc
Impedance	50 ohm	50 ohm
Connector Quantity and Type	8 x 4.3-10 female	16 x 4.3-10 female

MECHANICAL DATA

Dimensions (H x W x D)	Spherical Lens diameter: 120cm/47inch Antenna dimensions: 128 X 145.6 X 143 cm 50.46 X 57.35 X 56.36 inch
Antenna Weight	91.06 kg 200.7 lbs
Radome Material	Fiber Glass
Mounting	Standard Pipe Mount Compatible pipe diameter: 6.1 – 11.4 cm 2.4 – 4.5 inch

ENVIRONMENTAL RATINGS

Humidity	95% RH @ +30°C
Temperature	-40°C to +70°C
Wind load (Front)	TBD

CONNECTOR LAYOUT:

