



## MS-MBA-2

**Lens Technology Enabled™ Multi-Beam Base-Station Antenna** perfect for 3 to 9 sector LTE cell site deployments, utilizes a patented spherical lens design with 3 isolated high-frequency (1695 – 2690 MHz) cross-polarized beams. Each beam has 2 cross-polarized ports for supporting 2X2 MIMO. Tilt is adjustable from 0 - 30° for each beam. High tilt provides null at horizon.

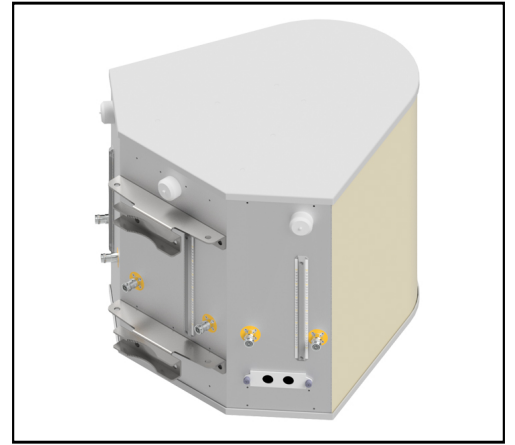


### PATTERN RESULTS:

**Horizontal Pattern (1.80GHz)**

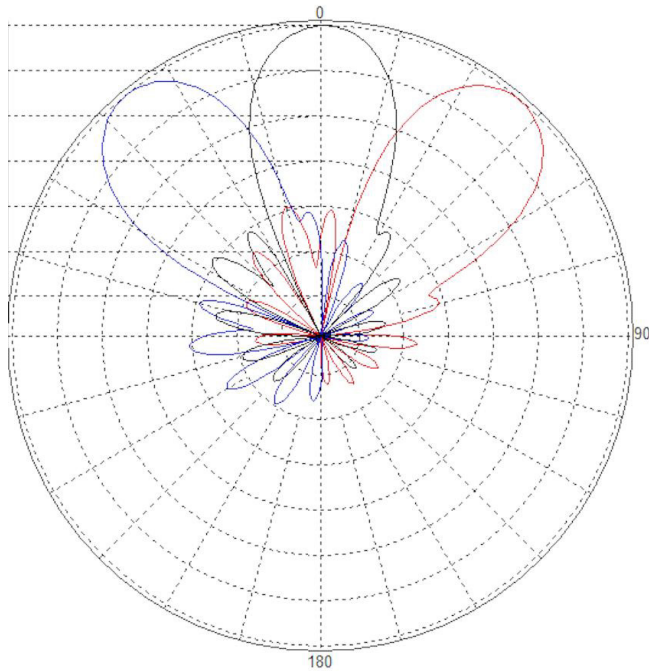

**Vertical pattern 0° tilt and 30° tilt (1.80GHz)**

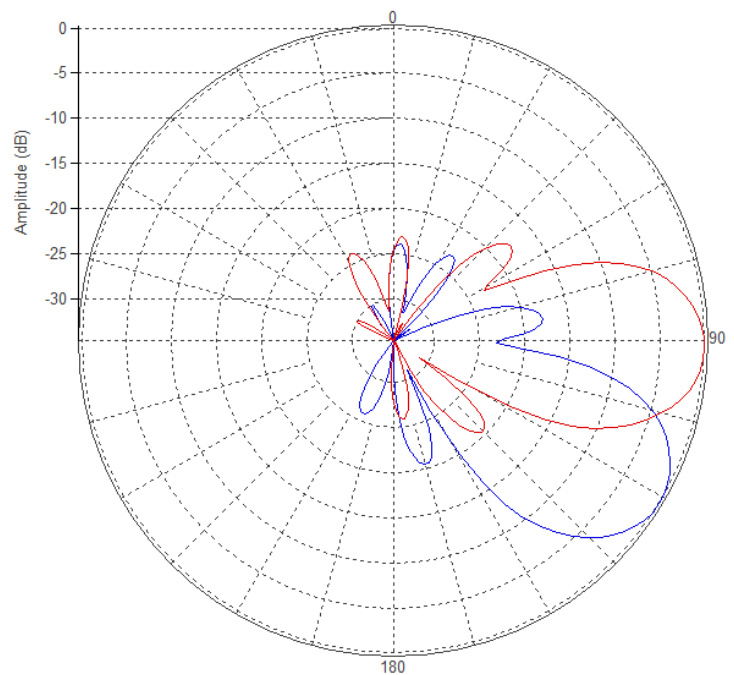

### TECHNICAL SPECIFICATIONS

Frequency	1695 – 2690 MHz
Gain	17.8dBi
VSWR	<1.5:1
Polarization	Dual Slant ±45°
Horizontal Coverage	120°
Horizontal Beamwidth (10dB level)	40°
Horizontal Beamwidth (3dB level)	23°
Vertical Beamwidth (10dB level)	40°
Vertical Beamwidth (3dB level)	23°
Beam Cross-over	10dB typical
Total Number of Beams	3
Number of Ports per Beam	2
Number of Ports Total	6
Beam Tilt (RET)	0° to 30°
First Sidelobe level	<-15dB
Front to Back Ratio	>28dB
Isolation Port to Port - Polarization	>25dB
Isolation Port to Port - Beam	>25dB
Power Rating	200W per port
Intermodulation	<-153dBc
Impedance	50 ohm
Connector Quantity and Type	6 x 4.3-10 female

### MECHANICAL DATA

Dimensions (H x W x D)	52.5 x 60.7 x 67.8 cm 20.7 x 23.9 x 26.7 inch
Antenna Weight	21.28 kg 46.9 lbs
Radome Material	Fiber Glass
Mounting	2 position pipe mount Compatible pipe diameter: 6.1 – 11.4 cm 2.4 – 4.5 inch

### ENVIRONMENTAL RATINGS

Humidity	95% RH @ +30°C
Temperature	-40°C to +70°C
Wind load @ 150km/hr	N / lbf Frontal 225 / 50.6 Lateral 323 / 72.6 Rear 264 / 59.4

### CONNECTOR/BEAM LAYOUT:

#### MS-MBA-2

#### PLAN VIEW CONNECTOR LAYOUT

