


## MS-MBA-3-C2A5


**Lens Technology Enabled™ Multi-Beam Base-Station Antenna perfect for six to nine sector LTE cell site deployments, utilizes a patented spherical lens design with 3 isolated C-Band (3700- 4200MHz) cross-polarized beams. Each beam has 2 ports, or 2X2 MIMO.**

**Tilt is adjustable from 0° to 12° for each beam.**

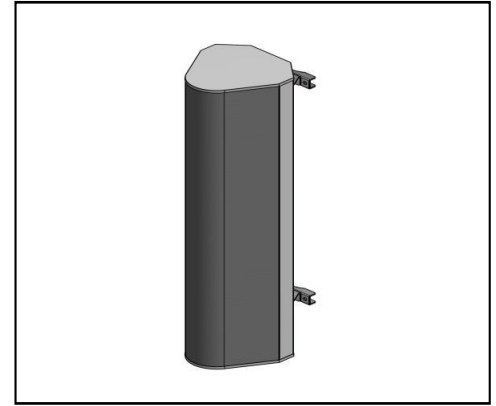


### PATTERN RESULTS:

**C-Band Horizontal Pattern (3.7GHz)**

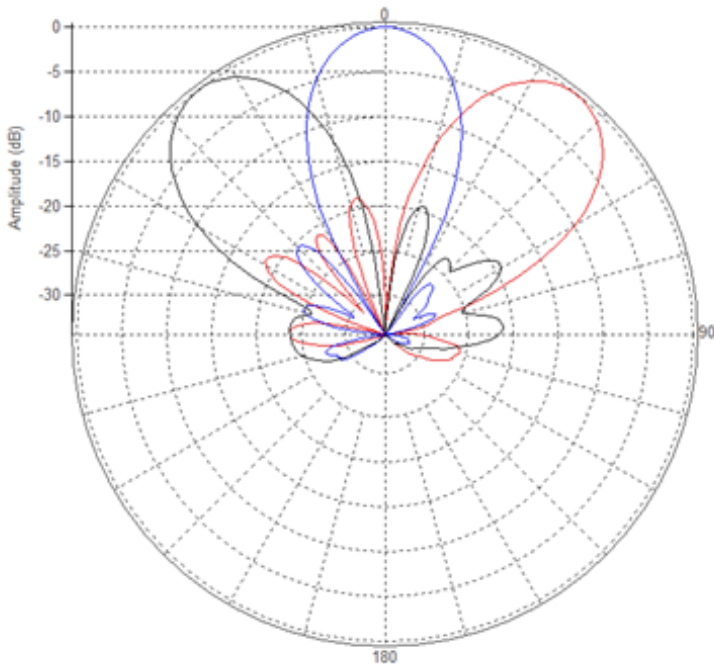

**C-Band Vertical Pattern at 0° and 12° Tilt (3.7GHz)**

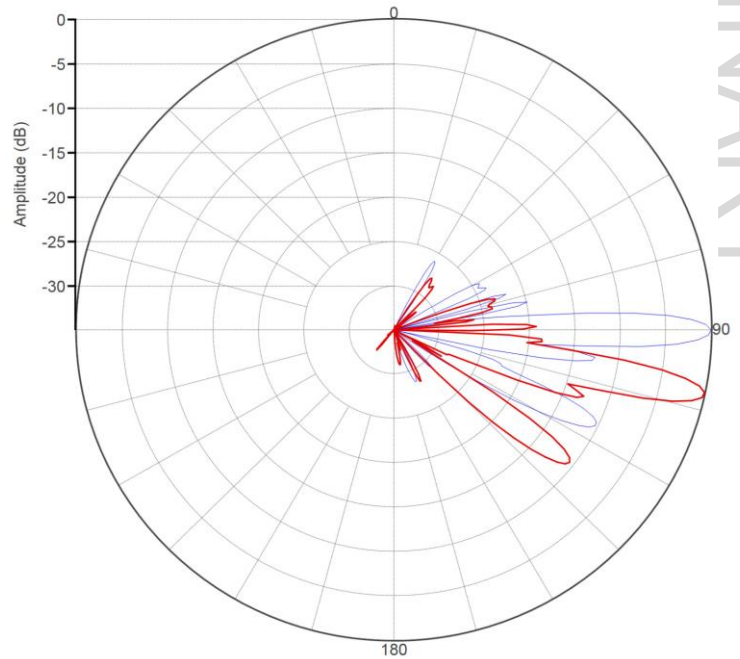

PRELIMINARY

### TECHNICAL SPECIFICATIONS PER BEAM

Frequency	3700 MHz – 4200 MHz
Gain	21.5dBi
VSWR	<1.5:1
Polarization	Dual Slant ±45°
Horizontal Coverage	120°
Horizontal Beamwidth (3dB level)	25°
Horizontal Beamwidth (10dB level)	45°
Vertical Beamwidth (3dB level)	6°
Beam Cross-over	8 dB typical
Total Number of Beams	3
Number of Ports per Beam	2
Number of Ports Total	6
Tilt Per Cross-Pol	0° - 12°
USLS (upper sidelobe suppression)	16dB
Azimuth Sidelobe Level	-18dB
Front to Back Ratio	28dB
Isolation Port to Port - Polarization	28dB
Isolation Port to Port - Beam	28dB
Power Rating	150W per port
Intermodulation	<-153dBc
Impedance	50 ohm
Connector Quantity and Type	6 x 4.3-10 Female

### MECHANICAL DATA

Dimensions (H x W x D)	104 x 29 x 29 cm 41 x 11.5 x 11.5 inch
Antenna Weight	14Kg 31lbs
Radome Material	Polycarbonate
Mounting	Standard Pipe Mount Compatible pipe diameter: 6.1 – 11.4 cm 2.4 – 4.5 inch

### ENVIRONMENTAL RATINGS

Humidity	95% RH @ +30°C
Temperature	-40°C to +70°C
Wind Load (Lateral)	TBD

### CONNECTOR/BEAM LAYOUT: