


MS-MBA-3-F4A3


Lens Technology Enabled™ Multi-Beam Base-Station Antenna perfect for six to nine sector LTE cell site deployments, utilizes a patented spherical lens design with 3 isolated CBR5-frequency (3300 - 4200MHz) cross-polarized beams. Each beam has 4 ports, or 4X4 MIMO.

Tilt is adjustable from 0° to 15° for each beam.

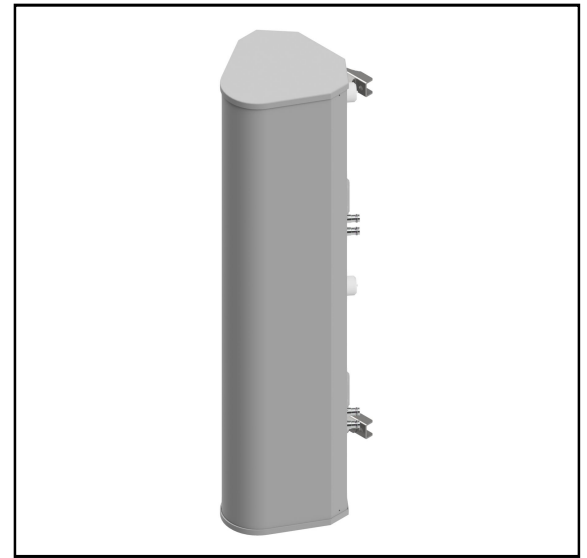


PATTERN RESULTS:

Horizontal Beam Pattern (3.7GHz)

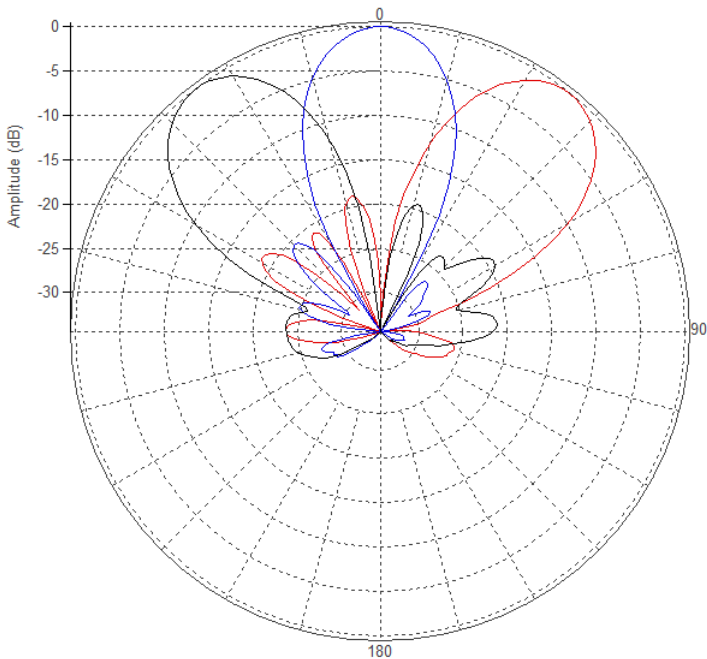

Vertical Pattern at 0° and 15° Tilt (3.7GHz)

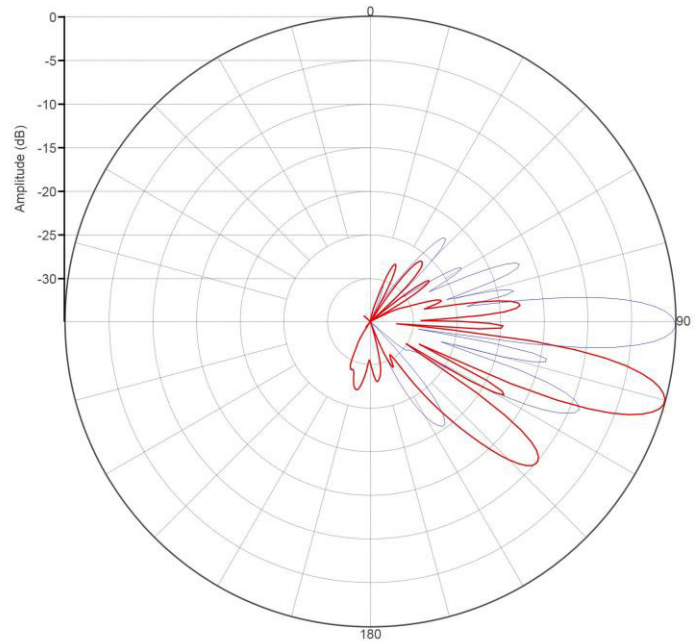

TECHNICAL SPECIFICATIONS PER BEAM

Frequency	3300 MHz – 4200 MHz
Gain	20dBi
VSWR	<1.5:1
Polarization	Dual Slant $\pm 45^\circ$
Horizontal Coverage	120°
Horizontal Beamwidth (3dB level)	25°
Horizontal Beamwidth (10dB level)	45°
Vertical Beamwidth (3dB level)	8°
Beam Cross-over	8 dB typical
Total Number of Beams	3
Number of Ports per Beam	4
Total Number of Ports	12
Tilt Per Cross-Pol	0°- 15°
Upper Side Lobe Suppression	16dB
Azimuth Sidelobe Level	-18dB
Front to Back Ratio	28dB
Isolation Port to Port - Polarization	28dB
Isolation Port to Port - Beam	28dB
Power Rating	150W per port
Intermodulation	<-153dBc
Impedance	50 ohm
Connector Quantity and Type	12 x 4.3-10 female

MECHANICAL DATA

Dimensions (H x W x D)	118.8 x 29.4 x 37 cm 46.8 x 11.6 x 14.6 inch
Antenna Weight	19.6 kg/43.2lbs [w/o Bracket] 21.6kg/47.7lbs [w/Bracket]
Radome Material	Polycarbonate
Mounting	Standard pipe mount Compatible pipe diameter: 6.1 – 11.4 cm 2.4 – 4.5 inch

ENVIRONMENTAL RATINGS

Humidity	95% RH @ +30°C
Temperature	-40°C to +70°C
Wind Load @ 150 km/hr	N/lbf Frontal: 291/65.4 Lateral: 374/84.1 Rea β 02/67.9

CONNECTOR LAYOUT:

