


MS-MBA-3-T4A2


Lens Technology Enabled™ Multi-Beam Base-Station Antenna perfect for **9 sector LTE cell site deployments**, utilizes a patented spherical lens design with **3 isolated low-frequency (617-896MHz) cross-polarized beams**. Each beam has **4 cross-polarized ports** for supporting **4x4 MIMO**.

RET available from **0 to 15°** for each beam.

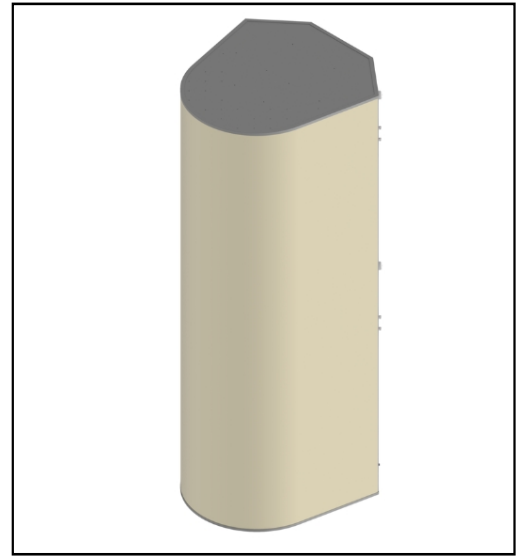


PATTERN RESULTS:

Horizontal Pattern (800MHz)

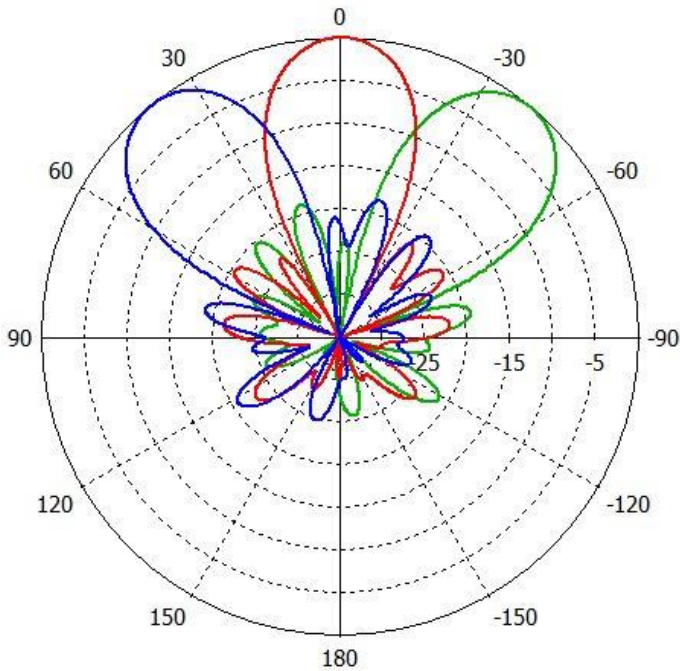

Vertical Pattern at 0° tilt and 15° tilt (800MHz)

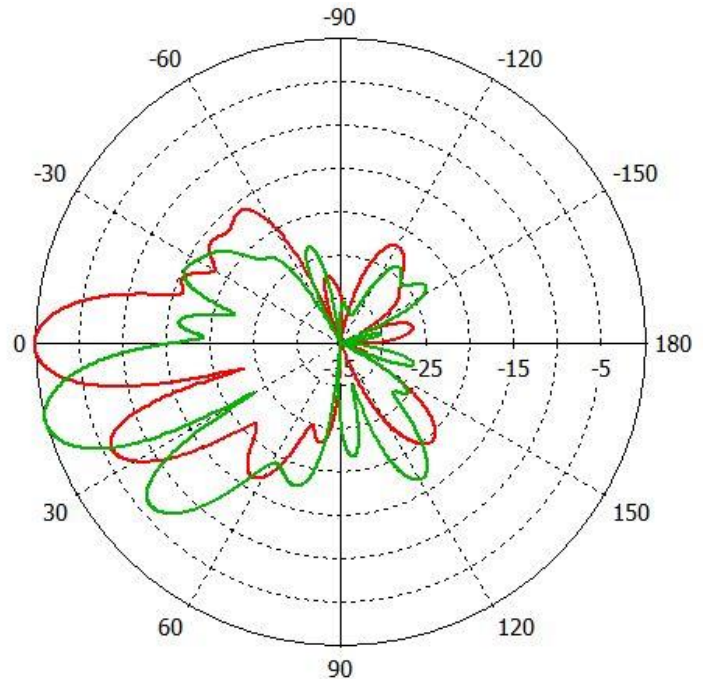

TECHNICAL SPECIFICATIONS

Frequency	617-896MHz
Gain	18dBi
VSWR	<1.5:1
Polarization	Dual Slant $\pm 45^\circ$
Horizontal Coverage	120°
Horizontal Beamwidth (10dB) level	43°
Horizontal Beamwidth (3dB) level	25°
Vertical Beamwidth (3dB) level	15°
Beam Cross-over	10dB typical
Total Number of Beams	3
Number of Ports per Beam	4
Number of Ports Total	12
RET Per Cross-Pol	0° to 15°
Azimuth Sidelobe level	<-15dB
USLS (Upper Sidelobe Suppression)	<-15dB
Front to Back Ratio	>28dB
Isolation Port to Port - Polarization	>28dB
Isolation Port to Port – Beam	>26dB
Power Rating	150W per port
Intermodulation	<-153dBc
Impedance	50 Ohm
Connector Quantity and Type	12 X 4.3-10 female

MECHANICAL DATA

Dimensions (H x W x D)	241.8 x 93.4 x 108.4 cm 95.2 x 36.8 x 42.7 inch
Antenna Weight	95kg 209.4lbs
Radome Material	Fiber Glass
Mounting	Standard position pipe mount Compatible pipe diameter: 6.1 – 11.4 cm 2.4 – 4.5 inch

ENVIRONMENTAL RATINGS

Humidity	95% RH @ +30°C
Temperature	-40°C to +70°C
Wind load @ 150 km/hr	N/ibf Frontal: 1436/323 Lateral: 2036/458 Rear: 2400/539

CONNECTOR LAYOUT:

