



MS-MBA-4.4.2-F4-H2-L2

Lens Technology Enabled™ Multi-Beam Tri Band Base-Station Antenna utilizes a patented spherical lens design with 4 isolated F Band (3300MHz – 4200MHz) cross-polarized beams, 4 isolated High Band (1695MHz – 2690MHz) cross-polarized beams and 2 isolated Low Band (698 MHz – 960 MHz) beams . Each F-Band beam has 4 ports per beam to support 4x4 MIMO . Each H & L-Band beam has 2 ports to support 2x2 MIMO . RET for F Band & High Band Beams 0°-20° . RET for Low Band Beams 0°-40°

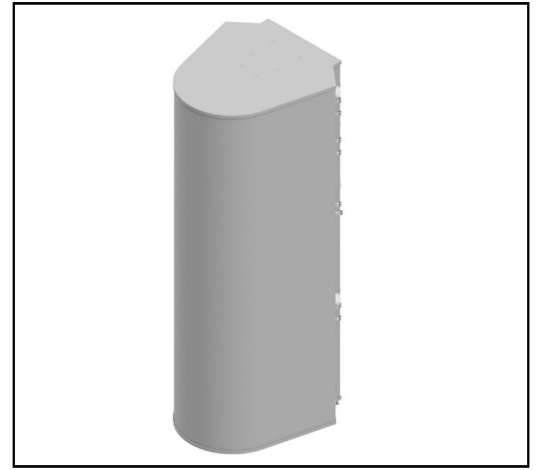


PATTERN RESULTS:


F-Band Horizontal Pattern (3.6GHz)

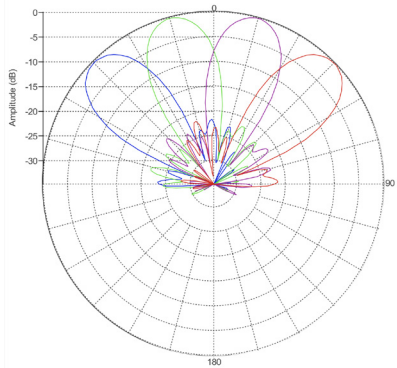


F-Band Vertical pattern (3.6GHz) at tilt 0° and 20°

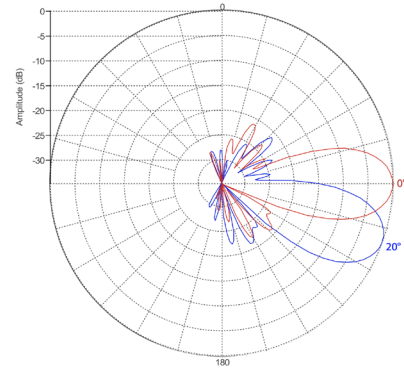


High-Band Horizontal Pattern (1.92GHz)

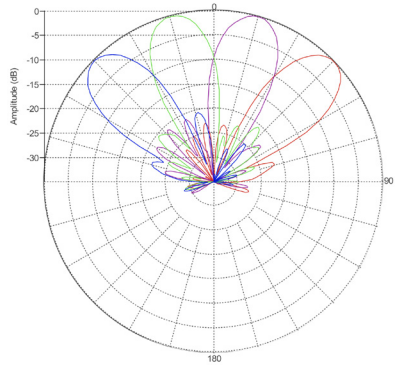


High-band Vertical Pattern (1.92GHz) at tilt 0° and 20°

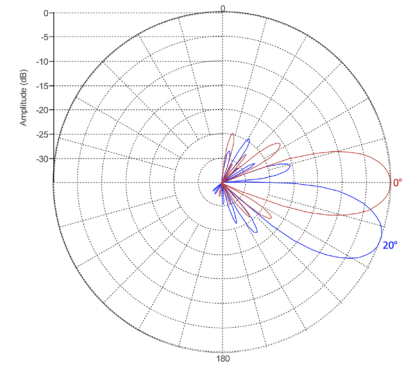

Low-Band Horizontal Pattern (0.8GHz)

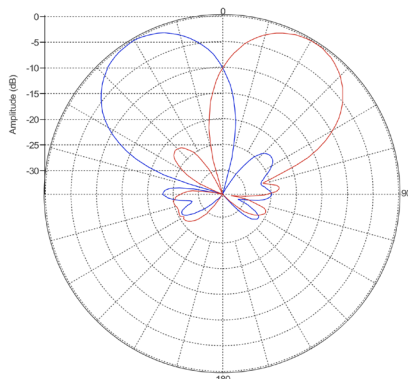

Low-band Vertical Pattern (0.8GHz) at tilt 0° and 40°

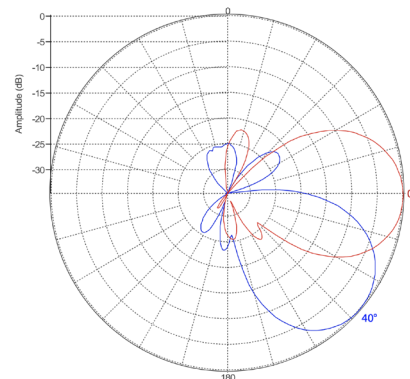

TECHNICAL SPECIFICATIONS PER BEAM

	3300-4200 MHz	1695-2690 MHz	698-960 MHz
Frequency	3300-4200 MHz	1695-2690 MHz	698-960 MHz
Gain	17dBi	19dBi	13.5dBi
VSWR	<1.5:1	<1.5:1	<1.5:1
Polarization	Dual Slant ±45°	Dual Slant ±45°	Dual Slant ±45°
Horizontal Coverage	120°	120°	120°
Horizontal Beamwidth (10dB)	34°	30°	60°
Horizontal Beamwidth (3dB)	19°	17°	34°
Vertical Beamwidth (10dB)	34°	30°	60°
Vertical Beamwidth (3dB)	19°	17°	34°
Beam Cross-over	8dB typical	10dB typical	10dB typical
Total Number of Beams	4	4	2
Number of Ports per Beam	4	2	2
Number of Ports Total	16	8	4
Tilt Per Cross-Pol; Remote Electrical Tilt (AISG 2.0)	0° - 20°	0° - 20°	0° - 40°
First Sidelobe Level	<-16dB	<-16dB	<-16dB
Front to Back Ratio	>28dB	>28dB	>28dB
Isolation Port to Port - Polarization	>28dB	>28dB	>28dB
Isolation Port to Port - Beam	>28dB	>28dB	>28dB
Power Rating	150W per port	150W per port	150W per port
Intermodulation	<-153dBc	<-153dBc	<-153dBc
Impedance	50 ohm	50 ohm	50 ohm
Connector Quantity and Type	16 x 4.3-10 female	8 x 4.3-10 female	4 x 4.3-10 female

MECHANICAL DATA

Dimensions (H x W x D)	163.5 X 61.7 X 72.1 cm 64.4 X 24.3 X 28.4 inch
Antenna Weight	51 kg 112.4 lbs
Radome Material	Fiber Glass
Mounting	Standard pipe mount Compatible pipe diameter: 6.1 – 11.4 cm 2.4 – 4.5 inch

ENVIRONMENTAL RATINGS

Humidity	95% RH @ +30°C
Temperature	-40°C to +70°C
Wind load @150km/hr	Frontal: 686N/154.21lb Lateral: 930N/209.11lb

CONNECTOR LAYOUT:

