



MS-MBC-3-L2-16

Multi-Beam Cylindrical Base-Station Lens Antenna;
Three isolated Low frequency (698 - 960 MHz) cross-polarized beams.
Each beam has two ports to support 2x2 MIMO.
RET (Smart Bias Tee & AISG 2.0) with 2°-15° for each beam.

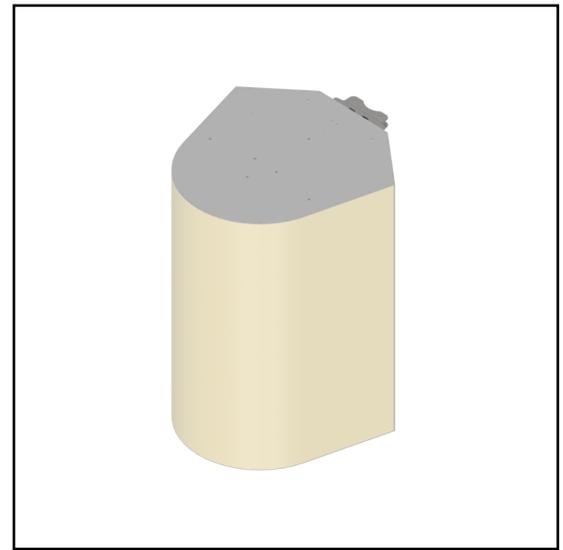


PATTERN RESULTS:

Horizontal Pattern (800MHz)

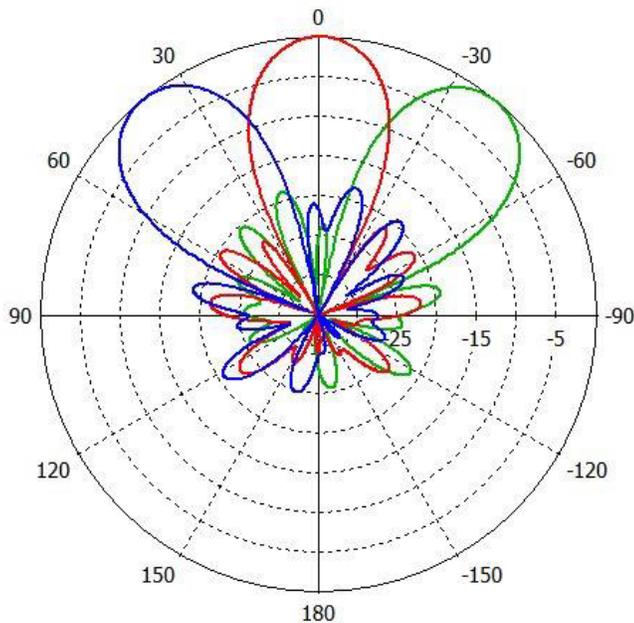

Vertical Pattern at 2° tilt and 15° tilt (800MHz)

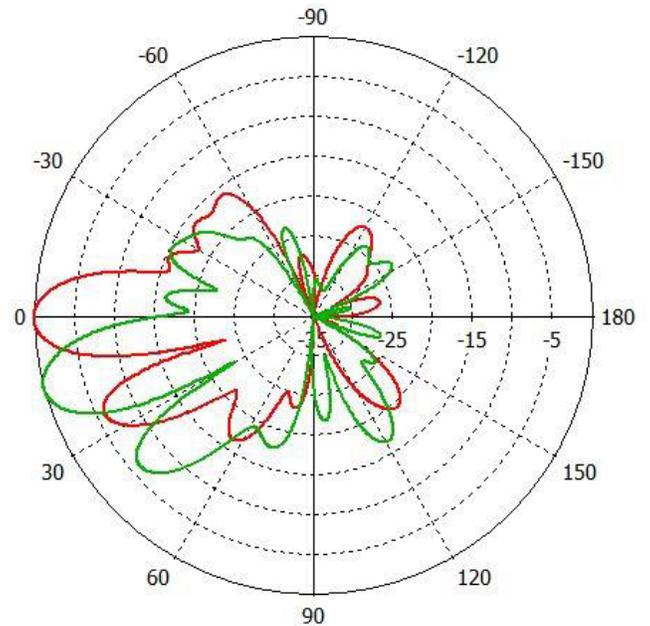

TECHNICAL SPECIFICATIONS

Frequency	698 - 960 MHz
Gain	18dBi
VSWR	<1.5:1
Polarization	Dual Slant ±45°
Horizontal Coverage	120°
Horizontal Beamwidth (10dB level)	40°
Horizontal Beamwidth (3dB level)	24°
Vertical Beamwidth (3dB)	16°
Total Number of Beams	3
Number of Ports per Beam	2
Number of Ports Total	6
RET (AISG & SBT)	2° to 15°
First Sidelobe level	< -15dB
Front to Back Ratio	>28dB
Isolation Port to Port - Polarization	>28dB
Isolation Port to Port - Beam	>26dB
Power Rating	150W per port
Intermodulation	<-153dBc
Impedance	50 ohm
Connector Quantity and Type	6 x 4.3-10 female

MECHANICAL DATA

Dimensions (H x W x D)	122.4 x 96.8 x 95.3 cm 48.2 x 38.1 x 37.5 inch
Antenna Weight	81 kg 178.5 lbs
Radome Material	Fiber Glass
Mounting	Standard position pipe mount Compatible pipe diameter: 10.1 – 15.2 cm 4 – 6 inch

ENVIRONMENTAL RATINGS

Humidity	95% RH @ +30°C
Temperature	-40°C to +70°C
Wind load @ 150km/h	N/lbf Frontal: 832/187.1 Lateral: 1057 / 237.6 Rear: 975 / 219.2

CONNECTOR LAYOUT:

