



MS-MBC-4.2-H4-8-L4-16

Multi-Beam Dual Band Cylindrical Lens Antenna:
4 independent high-frequency (1695 - 2690 MHz) dual-polarized beams
and 2 independent low-frequency (698 - 960 MHz) dual-polarized beams
with 4x4 MIMO support. Each beam has independent RET, for high
frequency 2° - 12° and for low frequency 2° - 17°.

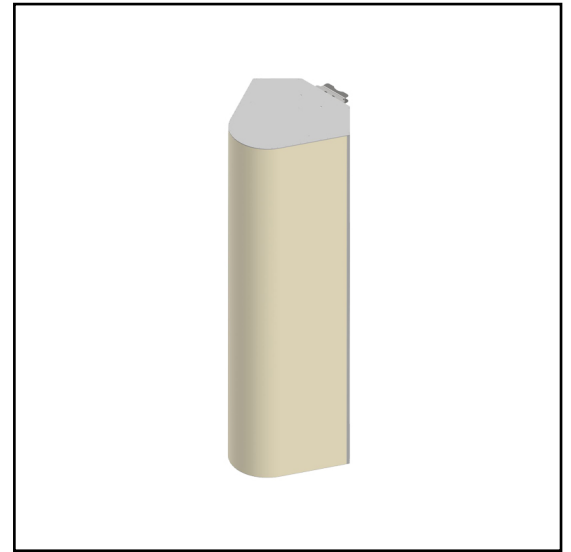


PATTERN RESULTS:


High-band Horizontal Pattern (1.92GHz)

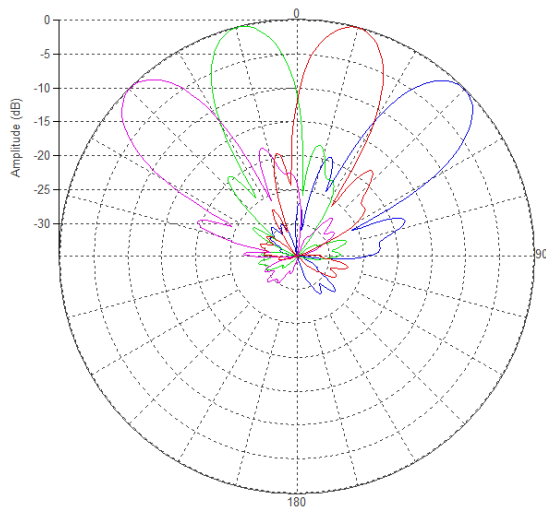


High-band Vertical Pattern (1.92GHz) at tilt 2° and 12°

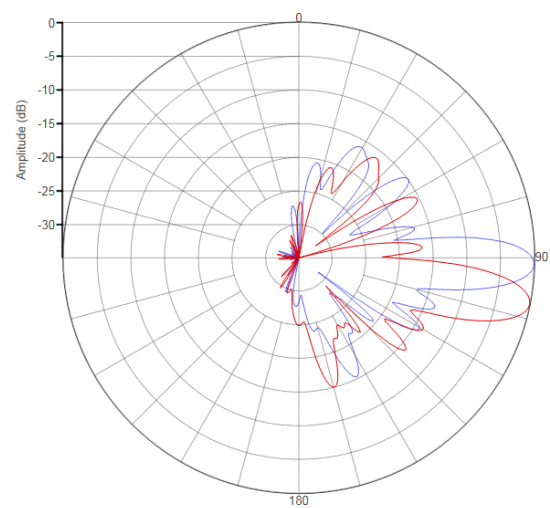

Low-band Horizontal Pattern (0.8GHz)

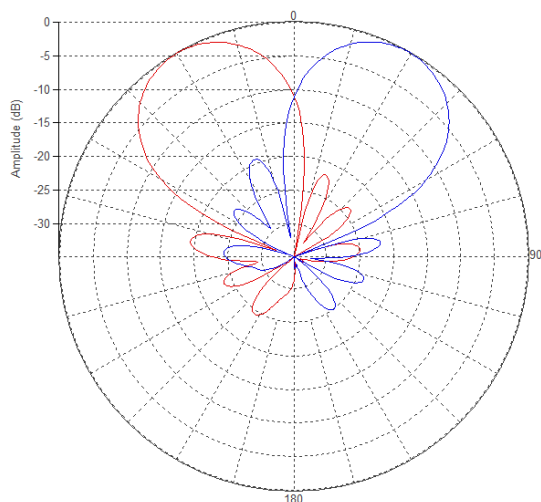

Low-band Vertical Pattern (0.8GHz) at tilt 2° and 17°

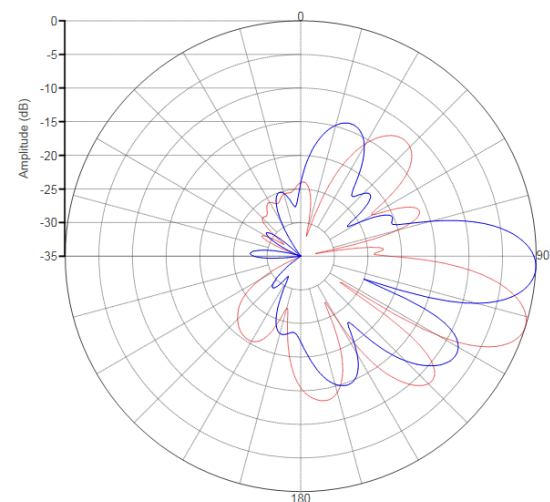

TECHNICAL SPECIFICATIONS PER BEAM

Frequency	698-960 MHz	1695-2690 MHz
Gain	15.8dBi	21dBi
VSWR	<1.5:1	<1.5:1
Polarization	Dual Slant $\pm 45^\circ$	Dual Slant $\pm 45^\circ$
Horizontal Coverage	120°	120°
Horizontal Beamwidth (10dB level)	60°	31°
Horizontal Beamwidth (3dB level)	34°	18°
Vertical Beamwidth (3dB level)	16°	8°
Beam Cross-over	10dB typical	10dB typical
Total Number of Beams	2	4
Total Number of Ports	8	16
Beam Tilt	2° to 17°	2° to 12°
First Sidelobe Level	<-15dB	<-15dB
Front to Back Ratio	>28dB	>28dB
Isolation Port to Port - Polarization	>26dB	>26dB
Isolation Port to Port - Beam	>26dB	>28dB
Power Rating	250W per port	200W per port
Intermodulation	<-153dBc	<-153dBc
Impedance	50 ohm	50 ohm
Connector Quantity and Type	8 x 4.3-10 female	16 x 4.3-10 female

MECHANICAL DATA

Dimensions (H x W x D)	230.8 x 77.2 x 78.4 cm 90.9 x 30.4 x 30.9 inch
Antenna Weight	82 kg 180.7 lbs
Radome Material	Fiber Glass
Mounting	Adjustable Clamps Compatible pipe diameter: 6.1 – 11.4 cm 2.4 – 4.5 inch

ENVIRONMENTAL RATINGS

Humidity	95% RH @ +30°C		
Temperature	-40°C to +70°C		
Wind loading @ 150km/h		N	lbf
	Frontal:	1283	288.4
	Lateral:	1584	356.1
	Rear:	1484	333.6

CONNECTOR LAYOUT:

