



MS-SB17-F

Lens Technology Enabled™ Base-Station Antenna perfect for stadium applications, utilizes a patented spherical lens design with 1 isolated F-Band Frequency (3300-4200MHz) cross-polarized beam. Beam has 2 cross-polarized ports for supporting 2X2 MIMO and low side-lobe levels.

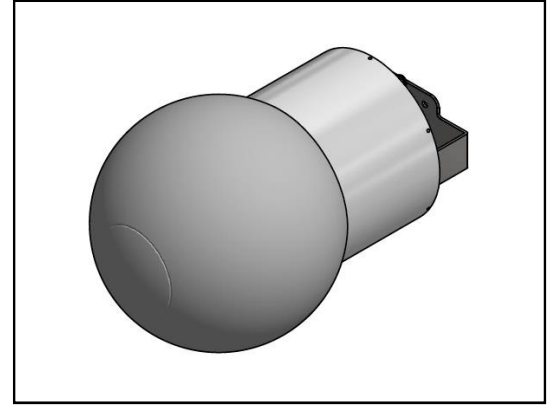


PATTERN RESULTS:

Horizontal Pattern (3.5GHz)

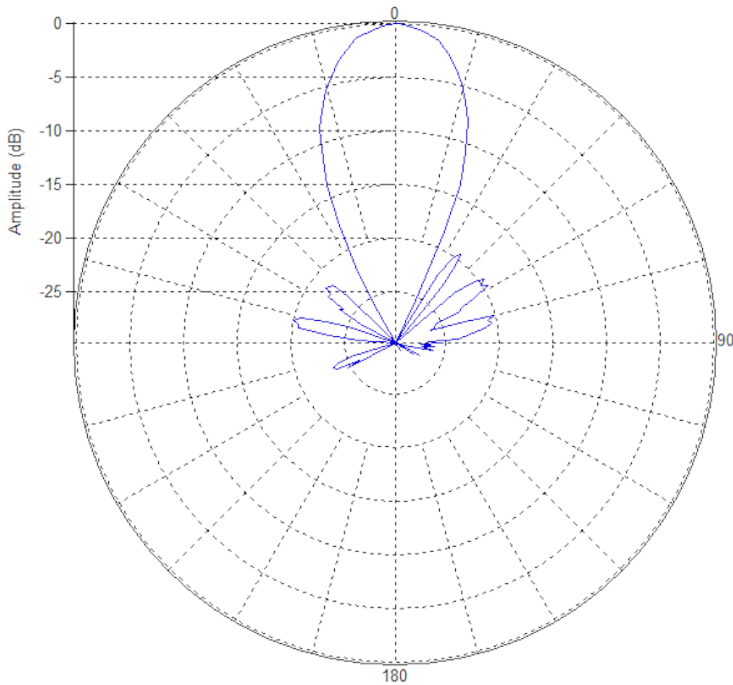

Vertical Pattern (3.5GHz)

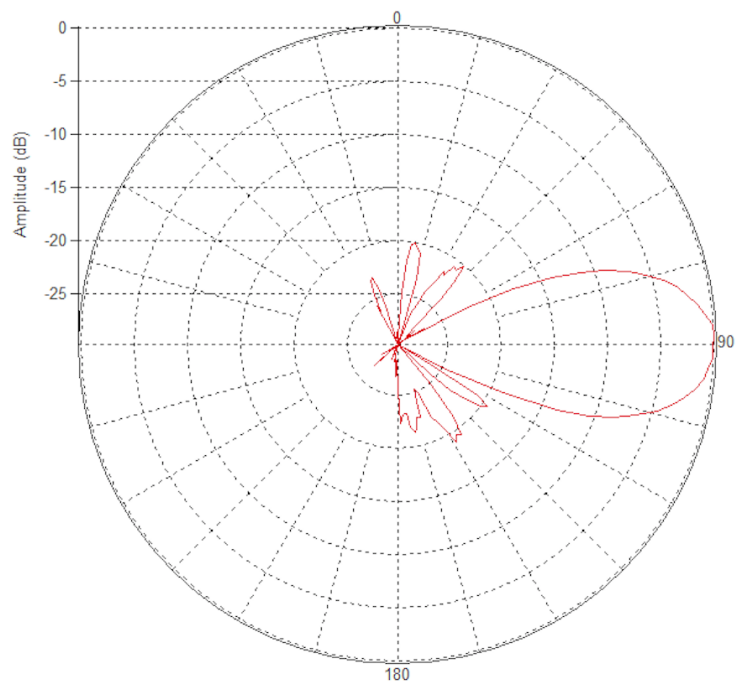

TECHNICAL SPECIFICATIONS

Frequency	3300– 4200 MHz
Gain	19dBi
VSWR	<1.5:1
Polarization	Dual Slant ±45°
Horizontal Coverage	30°
Horizontal Beamwidth (3dB)	17°
Vertical Beamwidth (3dB)	17°
Total Number of Beams	1
Number of Ports per Beam	2
First Sidelobe level	<-20dB
Front to Back Ratio	>28dB
Isolation Port to Port - Polarization	>28dB
Power Rating	150W per port
Intermodulation	<-153dBc
Impedance	50 ohm
Connector Quantity and Type	2 x 4.3-10 female

MECHANICAL DATA

Dimensions (H x W x D)	25 x 25 x 43 cm 10 x 10 x 17inch
Antenna Weight	3 kg 6 lbs
Radome Material	Polycarbonate
Mounting	TBD

ENVIRONMENTAL RATINGS

Humidity	95% RH @ +30°C
Temperature	-40°C to +70°C
Wind load @ 160 km/hr	N/lbf Frontal :27.8/6.25 Lateral:56.7/12.74

CONNECTOR LAYOUT:

